



550-570w Draco Module Series

N-TOPCON HIGH EFFICIENCY MONO BM6-16B-G

Bloomberg
NEW ENERGY FINANCE

Tier1



Extraordinary Product Performance


- Up to 30% additional power yield benefited from bifacial technology and up over 80% cell bifaciality
- Competitive high-temperature performance with ameliorated temperature coefficient
- Better weak illumination response, higher power generation with N-type technology

Higher Quality Reliability

- Zero Light Induced Degradation(LID), can increase power generation
- Encapsulation with POE and dual glass contributes to excellent anti-PID characteristic
- First-year degradation is less than 1.0%, with linear degradation of 0.4% per year for 30 years

Shorter Payback Time

- BIPV , vertical installation , snowfield , high-humid area , windy and dusty area
- Safer and easier handling during transportation and installation

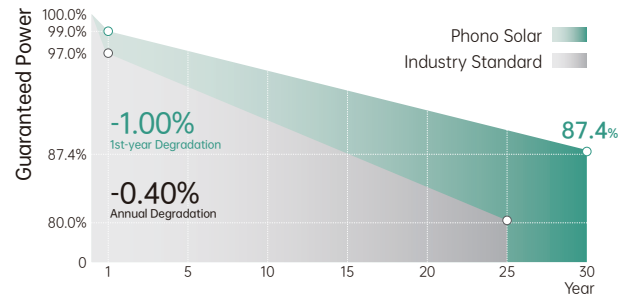

15-year
Product Warranty

30-year
Linear Performance Warranty

MANAGEMENT SYSTEM CERTIFICATES

IEC 61215, IEC 61730

ISO 9001
2015 / Quality management system

ISO 14001
2015 / Standards for environmental management system

ISO 45001
2018 / International standards for occupational health & safety



Electrical Typical Values

Model	1000V	PS550M8GF-24/TNH		PS555M8GF-24/TNH		PS560M8GF-24/TNH		PS565M8GF-24/TNH		PS570M8GF-24/TNH	
	1500V	PS550M8GFH-24/TNH		PS555M8GFH-24/TNH		PS560M8GFH-24/TNH		PS565M8GFH-24/TNH		PS570M8GFH-24/TNH	
Testing Condition		STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT
Rated Power (Pmpp)		550	417	555	421	560	425	565	429	570	433
Rated Current (Imp)		13.06	10.53	13.12	10.57	13.18	10.62	13.24	10.67	13.30	10.72
Rated Voltage (Vmpp)		42.12	39.66	42.31	39.84	42.49	40.01	42.68	40.19	42.86	40.36
Short Circuit Current (Isc)		13.71	11.05	13.77	11.10	13.83	11.15	13.89	11.20	13.95	11.24
Open Circuit Voltage (Voc)		50.78	48.65	51.01	48.87	51.25	49.10	51.49	49.33	51.73	49.56
Module Efficiency (%)		21.29		21.48		21.68		21.87		22.07	

STC(Standard Testing Conditions): Irrandance 1000W/m², AM 1.5, Cell Temperature 25°C

NOCT (Nominal Operation Cell Temperature): Irradiance 800W/m², Ambient Temperature 20°C , Spectra at AM1.5, Wind at 1m/s

Electrical Characteristics With Different Power Bin

5%	Maximum Power (W)	572	577	582	588	593
	Module Efficiency (%)	22.14	22.34	22.55	22.75	22.95
15%	Maximum Power (W)	616	622	627	633	638
	Module Efficiency (%)	23.85	24.06	24.28	24.50	24.71
25%	Maximum Power (W)	660	666	672	678	684
	Module Efficiency (%)	25.55	25.78	26.01	26.25	26.48

Mechanical Characteristics

Cell Type	Monocrystalline 182mm x 91mm
Dimension (L x W x H)	Length: 2278mm (89.69 inch) Width: 1134mm (44.65 inch) Height: 30mm (1.18 inch)
Weight	32.0kg (70.55 lbs)
Glass	2.0mm/2.0mm toughened glass
Frame	Anodized Aluminium Alloy
Cable (Including Connector)	4mm ² (IEC), (+): 450mm,(-): 250mm or Customized Length

Temperature Ratings

Voltage Temperature Coefficient	-0.25%/°C
Current Temperature Coefficient	+0.045%/°C
Power Temperature Coefficient	-0.30%/°C
Tolerance	0~+5w
NOCT	42±2°C
Bifaciality	80±5%

Absolute Maximum Rating

Operating Temperature	From -40 to + 85°C
Hail Diameter @ 80km/h	Up to 25mm
Front Side Maximum Static Loading	5400Pa
Rear Side Maximum Static Loading	2400Pa
Maximum Series Fuse Rating	30A
PV Module Classification	II
Fire Rating (IEC61730)	Class C
Maximum System Voltage	DC 1000V/1500V

Packing Configuration

Container	20' HQ	40' HQ
Pieces/Container	180	720

Electrical Characteristics

